


Surface Acoustic Wave Touch Screen Product Manual

ITEM	SAW TOUCH SCREEN
PART NUMBER	ETT4L17d1S
DATE	2010. 01

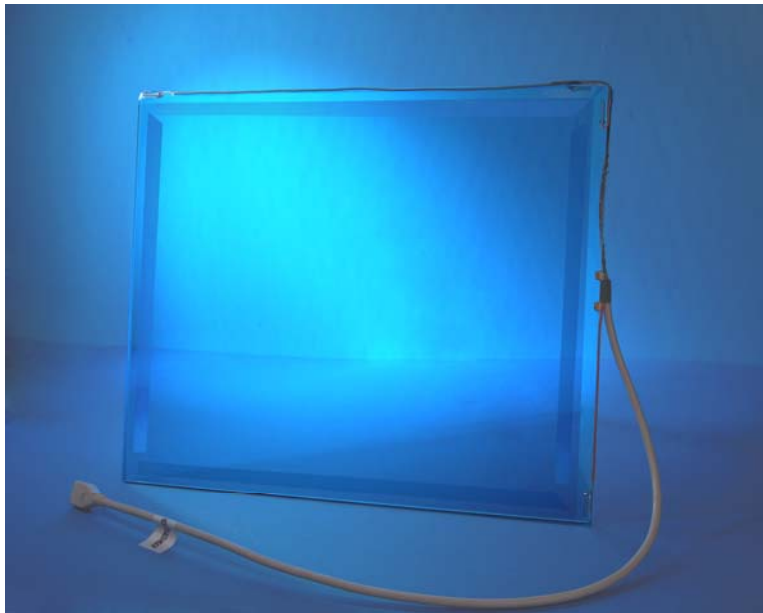

CONTENTS

COVER	1/5
CONTENTS	2/5
1. Mechanical.....	3/5
2. Touch Characteristics.....	3/5
3. Electrical	3/5
4. Environment	4/5
5. Appendix	4/5

● ETT4L17d1S**1. Mechanical**

Touch Size (Out line)	367(W) X 301(D) X 4(H)mm
Viewable Area	342(W) X 274(D)mm
Useful Screen Area	340(W) X 272(D)mm
Weight	1Kg
Drawing	Please refer to Appendix 1

2. Touch Characteristics

Fit In With	LCD 17.1"
Touch Point	over 10000 touch points per square inch
Resolution	4096(W) × 4096(D)
Touch Sensibility	<85 Gram
Response Speed	< 10ms
Light Transmission	> 92%
Surface Hardness	Mohs Rating Of 7
Touch Intensity	Over 50,000,000 single point touch
Stability	Good Stability, No Excursion, Correct The Mistake Automated

3. Electric

Operating Voltage	DC 12 V
Power Supply	PC Power
Power	1W
EMI	CE、FCC、RoHS
Communication	COM / USB

4. Environment

Temperature	Operating -20 °C to 50 °C
	Storage -40 °C to 70 °C
Humidity	Operating 0% to 85%
	Storage 0% to 95%
Relative Humidity	Operating 40 °C at 90% RH, noncondensing
Altitude Operating	3,000m
Warranty	Touch screen: 1 – years limited warranty

5. Appendix 1 : Touch Panel

